INSTALLATION GUIDE

Product code: GH-C100-CCT-PA

100 W LED Canopy Light – Power & Colour Adjustable

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × 100 W canopy light with built-in driver (sensor fitted if ordered)

YOU WILL NEED

- Drill and masonry/wood bits
- Screwdriver and spanner
- Wire stripper and voltage tester
- IP-rated junction box
- Ladder or elevated work platform

BEFORE YOU START

- Check the ceiling or canopy can hold the light's weight (3 kg).
- Plan the cable entry so water can't run into the light.
- Turn off the power at the switchboard and test it is dead.

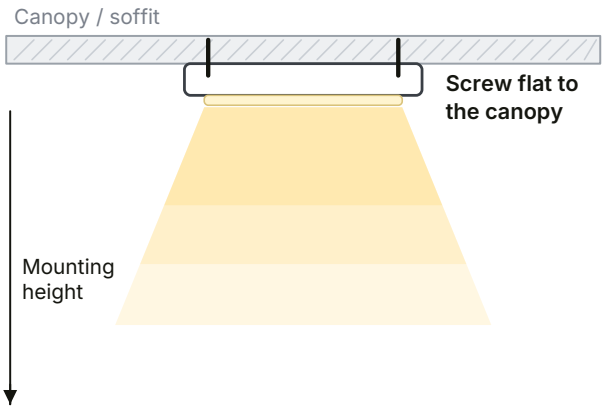

STEP BY STEP

1. Set the power and colour switches first.
2. Hold the light in place and mark the fixing holes on the canopy or ceiling.
3. Drill and fit fixings rated for the light's weight.
4. Bring the 240 V supply cable to an IP-rated junction box next to the light.
5. Connect the light's lead to Active, Neutral and Earth in the junction box, following the wiring label on the light.
6. Screw the light firmly to the surface, then seal the cable entry and close the junction box.
7. Turn the power on and check it works.

SETTINGS & USE

- The power and colour switches are in the small control box on the side of the light – open its cover to reach them, then close it firmly.
- Power switch: 100 W, 80 W, 60 W or 40 W.
- Colour switch: 4000 K, 5000 K or 6500 K.
- Sensor version: set the sensor before mounting, using its own instructions.

DO NOT

- Don't connect to a dimmer.
- Don't open the sealed light body – it is IP65 sealed.
- Don't leave cable joins exposed to rain – use an IP-rated junction box.

CARE & TROUBLESHOOTING

- Turn off, then wipe the lens with a soft damp cloth; no solvents.
- If it won't start, check the supply at the junction box and the switch settings.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 5 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.