INSTALLATION GUIDE

Product code: F100-90-CCT-SO

100 W LED Floodlight – Tricolour, 90° Beam

240 V product: it must be installed and connected by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × 100 W LED floodlight with fixed supply cord
- 1 × adjustable mounting bracket (fitted)

YOU WILL NEED

- Drill and fixings to suit the wall, eave or pole
- Spanner and screwdriver
- Weatherproof (IP-rated) junction box
- Wire stripper and voltage tester

BEFORE YOU START

- Turn off the power at the switchboard and test it is dead.
- Check the wall, eave or pole can safely hold 1.8 kg.
- Plan a spot for the weatherproof junction box within reach of the light's fixed cord.

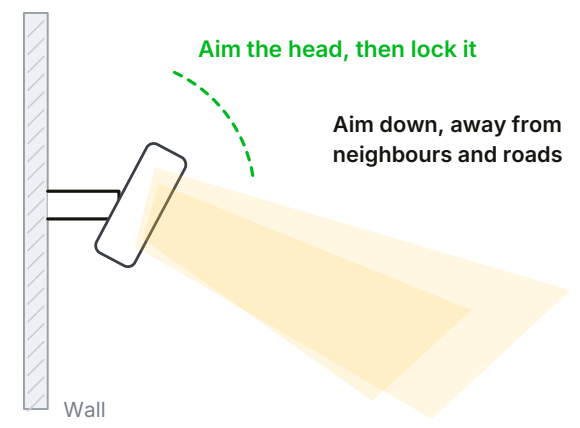

STEP BY STEP

1. Undo the small sealed cap on the back of the light and set the colour switch. Refit the cap firmly so it stays watertight.
2. Hold the bracket in place on the wall, eave or pole and mark the fixing holes.
3. Drill and fix the bracket with fixings that suit the surface.
4. Bring the 240 V supply to a weatherproof junction box near the light.
5. Connect the light's cord: Brown = Active, Blue = Neutral, Green/Yellow = Earth. Seal the box.
6. Loosen the side bolts, tilt the light to aim it, then tighten the bolts firmly.
7. Turn the power on and check the light works and points where you want.

SETTINGS & USE

- Colour switch under the sealed cap on the back: WW = 3000 K warm white, NW = 4000 K natural white, DW = 5000 K bright white.
- Change the colour only with the power off, and always refit the cap.
- Starts instantly, so it can be switched by a separate motion sensor (not included).

DO NOT

- Don't connect it to a dimmer – it is not dimmable.
- Don't leave the colour-switch cap off – water will get in.
- Don't cover the cooling fins on the back.
- Don't cut or replace the supply cord – if it is damaged, replace the light.

CARE & TROUBLESHOOTING

- Turn off the power, then wipe the glass and fins with a soft damp cloth.
- If it won't turn on, have an electrician check the supply and the junction box.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty.
Warranty: 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.