INSTALLATION GUIDE

Product code: GH-C150W-40K

150 W LED Canopy Light – 4000 K

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × 150 W canopy light with built-in driver and supply lead
- 4 × M6 × 40 mm screws with plastic plugs

YOU WILL NEED

- Drill with 8 mm masonry/ wood bit
- Screwdriver and spanner
- Wire stripper and voltage tester
- IP-rated junction box
- Ladder or elevated work platform

BEFORE YOU START

- Mount it on a ceiling or canopy about 4–15 m high that can hold 4.6 kg.
- Plan the cable entry so water can't run into the light.
- Turn off the power at the switchboard and test it is dead.

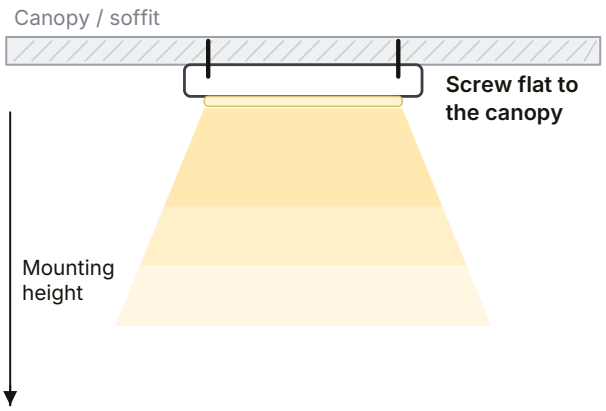

STEP BY STEP

1. Mark 4 holes in a 270 × 220 mm rectangle on the ceiling, drill them with an 8 mm bit and tap in the plastic plugs.
2. Bring the 240 V supply cable to an IP-rated junction box next to the light.
3. Connect the light's lead: Brown = Active, Blue = Neutral, Green/Yellow = Earth.
4. Fix the light to the ceiling with the 4 × M6 × 40 mm screws.
5. Seal the cable entry and close the junction box.
6. Turn the power on and check it works.

DO NOT

- Don't connect to a dimmer.
- Don't fit it in a closed-in space with poor airflow or high heat.
- Don't open the sealed light body – it is IP65 sealed.
- Don't leave cable joins exposed to rain – use an IP-rated junction box.

CARE & TROUBLESHOOTING

- Turn off, then wipe the lens with a soft damp cloth; no solvents.
- If it won't start, check the supply at the junction box.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 4 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.