10 W 12 V LED Garden Spike Light – Warm/Natural White

Licensed electrician recommended. The 12 V transformer plugs into a 240 V outdoor power point. Hard-wiring a transformer to 240 V must be done by a licensed electrician (AS/NZS 3000).

IN THE BOX


- 1 × 10 W garden spike light
- 1 m cable fitted
- Transformer, controller and remote are sold separately

YOU WILL NEED

- 2-core rubberised outdoor cable (sold by the metre)
- Waterproof connectors
- Silicone sealant
- Small spade
- Wire stripper

BEFORE YOU START

- Count your lights (10 W each, kept under 80% of the transformer): 60 W IP65 transformer up to 4 lights, 200 W up to 16.
- With a controller, put no more than 8 lights on each controller.
- Plan cable runs and keep the transformer off the ground in a sheltered spot.

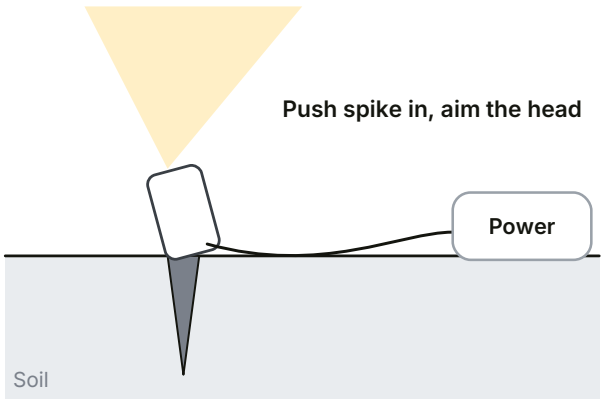

STEP BY STEP

1. Push the spike into firm ground where you want the light.
2. Lay 2-core cable from the transformer along the light positions.
3. Join each light's 1 m cable to the main cable: red to +, black to –.
4. Seal every joint with a waterproof connector and silicone.
5. If dimming, fit the controller after the transformer in a dry, sheltered spot (it is not waterproof): input red V+, black V–.
6. Plug the transformer into an outdoor power point (a hard-wired transformer must be connected by a licensed electrician).
7. Turn on, aim each head, then tighten it.

SETTINGS & USE

- Controller: press SET until the indicator shows RED for single-colour lights.
- Link a remote: turn the power off for 10 seconds, back on, then within 3 seconds press the zone ON button 3 times. The lights blink 3 times when linked.
- Smart controller: add it in the Smart Life (Tuya) app for timers and schedules.

DO NOT

- Never connect the lights straight to 240 V.
- Don't load a transformer past its light count.
- Don't reverse the controller input wires – it will fail and isn't covered.

CARE & TROUBLESHOOTING

- Check joints and cables each year; old connectors can let water in.
- If a light is out, check its connector first, then the transformer.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 1 year. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.