INSTALLATION GUIDE

Product code: F200-CCT-PA-120

200 W LED Floodlight – Power & Colour Select, 50 × 120°

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × 200 W floodlight with built-in driver and fitted power lead
- 1 × U-shaped mounting bracket (fitted)
- Wall fixings and junction box not included

YOU WILL NEED

- Drill and masonry/wood bits
- Spanner and screwdriver
- Wire stripper
- Voltage tester
- Ladder or elevated work platform
- IP-rated junction box

BEFORE YOU START

- Check the wall, beam or pole can safely hold the light (about 3.3 kg – allow up to 4.5 kg to be safe).
- Turn off the power at the switchboard and test it is dead.
- Plan a spot for the IP-rated junction box within reach of the light's fitted power lead.

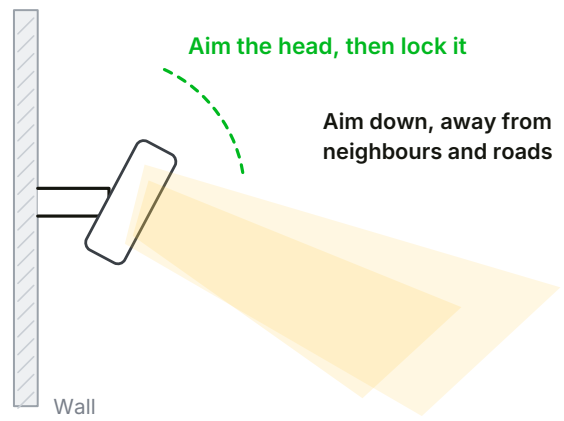

STEP BY STEP

1. Unscrew the round sealed cap on the back of the light to reach the power and colour switches.
2. Set the switches, then screw the cap back on tightly so water can't get in.
3. Hold the U-bracket in place on the wall, ceiling or ground and mark the holes.
4. Drill and fix the bracket with bolts or screws rated for the weight.
5. Join the power lead to the supply in an IP-rated junction box: brown to Active, blue to Neutral, green/yellow to Earth.
6. Aim the light, then tighten the bracket bolts on both sides.
7. Turn the power on and check it works.

SETTINGS & USE

- Power switch: 200 W, 150 W or 100 W.
- Colour switch: 3000 K (warm), 4000 K (natural) or 5000 K (cool).
- Starts instantly, so it can be switched by a separate motion sensor or timer (not included).
- Only change switches with the power off, and always refit the sealed cap.

DO NOT

- Don't connect to a dimmer.
- Don't cover the fins or touch the light while it is on – it gets warm.
- Don't leave the cable join or switch cap open to rain.

CARE & TROUBLESHOOTING

- Turn off, then wipe the front with a soft damp cloth; no solvents.
- If it won't start, check the supply, the cable join and the switch settings.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.