INSTALLATION GUIDE

Product code: GH-W50-CCT

50 W LED Wall Pack – Power & Colour Selectable

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × LED wall pack with built-in driver

YOU WILL NEED

- Drill and masonry bit
- Screwdriver
- Spirit level
- Wire stripper and voltage tester

BEFORE YOU START

- Turn off the power at the switchboard and test it is dead.
- Pick the wattage and colour you need before mounting.
- Check the wall can safely hold 3 kg.

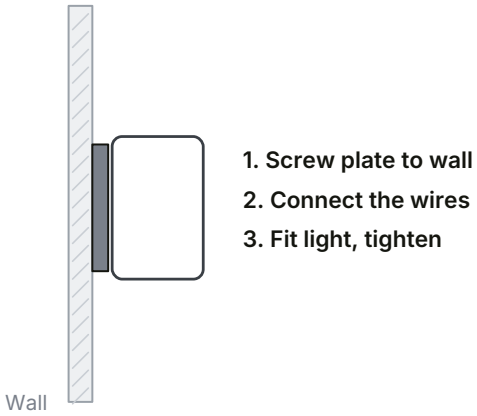

STEP BY STEP

1. Open the light's front frame to reach the wiring and switches.
2. Hold the back box on the wall, mark the holes, drill and fit plugs.
3. Feed the cable through a sealed entry and screw the light to the wall.
4. Connect Active (L), Neutral (N) and Earth to the terminals, following the label inside the light.
5. Set the power switch (20/30/40/50 W) and colour switch (4000/5000/6500 K).
6. Close the frame and check the gasket is seated.
7. Set the tilt (0–90°) and turn the power on.

SETTINGS & USE

- Power switch: 20, 30, 40 or 50 W.
- Colour switch: 4000 K, 5000 K or 6500 K.

DO NOT

- Don't use with a dimmer.
- Don't leave the cable entry unsealed.
- Don't change switches with the power on.

CARE & TROUBLESHOOTING

- Turn off the power, then wipe the lens with a soft damp cloth.
- If it won't turn on, turn off the power and call your electrician.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 5 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.